


### 5089# 伺服硬軌滾珠滑台 (250) 上蓋滑道均貼耐磨片 With Turcite for Guideway Servo Slide With Hardness Guideway and Ball Screws (250)

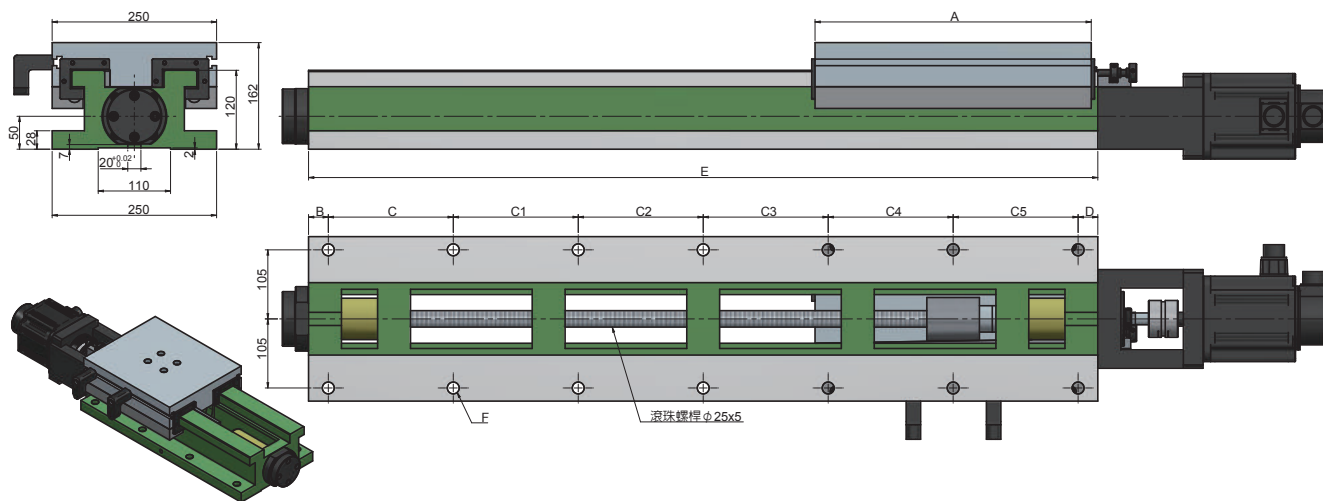


單位：mm

規格 Model	A	B	C	C1	C2	C3	C4	C5	D	E	F	行程 Travel	重量 Weight
BS250-300/420	300	35	150	200	—	—	—	—	35	420	6-φ18 鑽通	100	82
BS250-300/560	300	35	165	165	165	—	—	—	30	560	8-φ18 鑽通	240	90
BS250-420/560	420	35	165	165	165	—	—	—	30	560	8-φ18 鑽通	120	94
BS250-420/670	420	35	140	140	140	180	—	—	35	670	10-φ18 鑽通	230	110
BS250-420/750	420	25	140	140	140	140	140	—	25	750	12-φ18 鑽通	310	130
BS250-420/940	420	35	175	175	175	175	175	—	30	940	12-φ18 鑽通	500	155
BS250-420/1200	420	30	190	190	190	190	190	190	30	1200	14-φ18 鑽通	760	192

※重量不含伺服馬達

### 5089# 伺服硬軌滾珠滑台 (250H) 上蓋滑道均貼耐磨片 With Turcite for Guideway Servo Slide With Hardness Guideway and Ball Screws (250H)

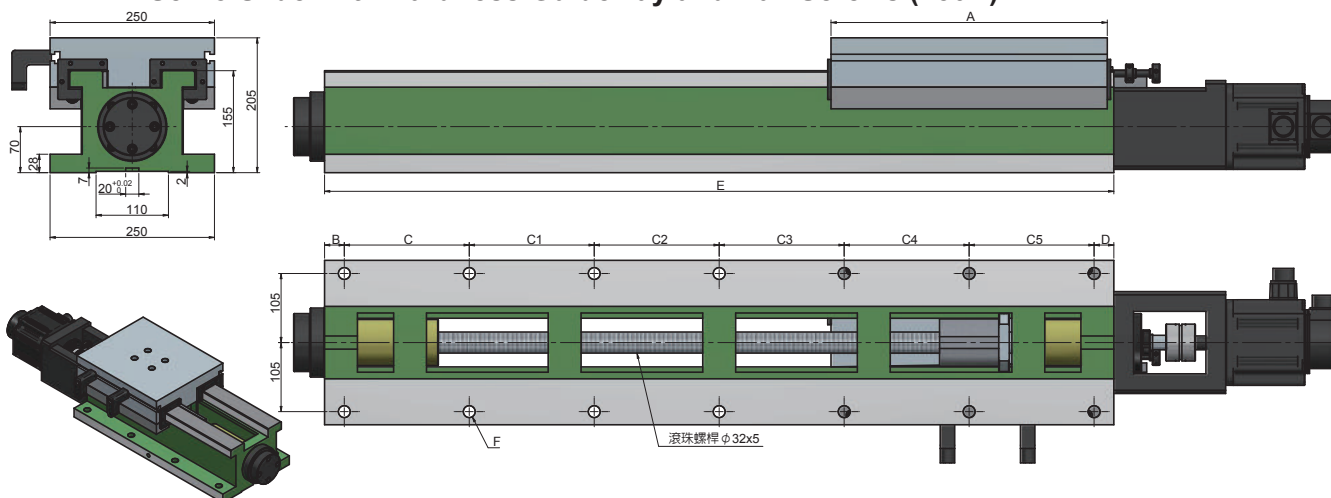

單位：mm

規格 Model	A	B	C	C1	C2	C3	C4	C5	D	E	F	行程 Travel	重量 Weight
BS250-300/420H	300	35	150	200	—	—	—	—	35	420	6-φ18 鑽通	100	92
BS250-300/560H	300	35	165	165	165	—	—	—	30	560	8-φ18 鑽通	240	100
BS250-420/560H	420	35	165	165	165	—	—	—	30	560	8-φ18 鑽通	120	108
BS250-420/670H	420	35	140	140	140	180	—	—	35	670	10-φ18 鑽通	230	130
BS250-420/750H	420	25	140	140	140	140	140	—	25	750	12-φ18 鑽通	310	148
BS250-420/940H	420	35	175	175	175	175	175	—	30	940	12-φ18 鑽通	500	178
BS250-420/1200H	420	30	190	190	190	190	190	190	30	1200	14-φ18 鑽通	760	215

※重量不含伺服馬達