


### 5089# 伺服硬軌滾珠滑台 (300) 上蓋滑道均貼耐磨片 With Turcite for Guideway Servo Slide With Hardness Guideway and Ball Screws (300)

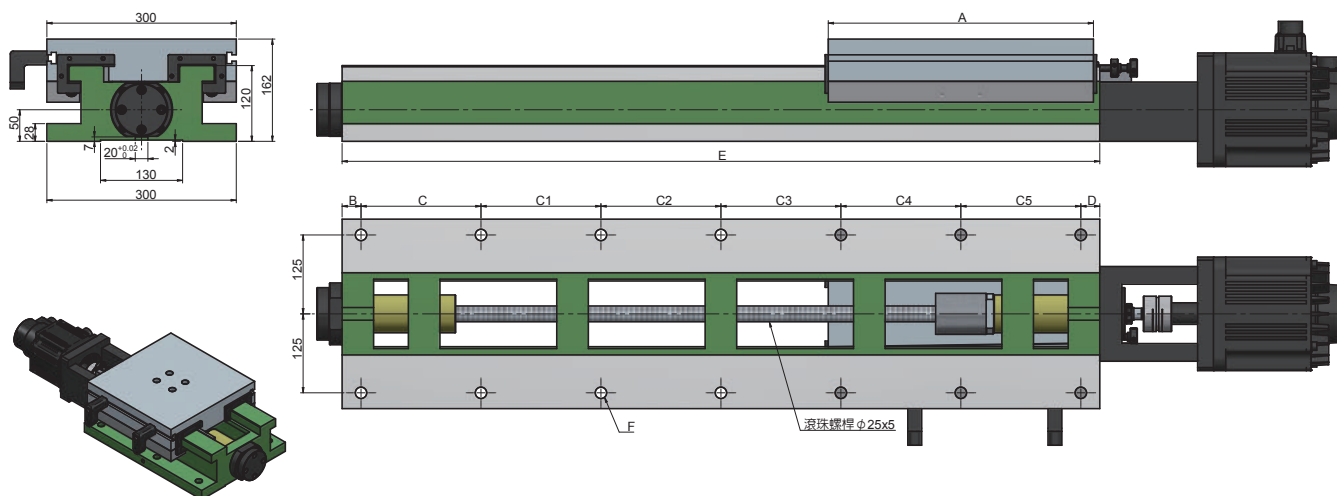


單位：mm

規格 Model	A	B	C	C1	C2	C3	C4	C5	D	E	F	行程 Travel	重量 Weight
BS300-300/420	300	35	150	200	—	—	—	—	35	420	6-φ 18 鑽通	100	100
BS300-360/560	360	35	165	165	165	—	—	—	30	560	8-φ 18 鑽通	180	115
BS300-420/560	420	35	165	165	165	—	—	—	30	560	8-φ 18 鑽通	120	117
BS300-420/670	420	35	140	140	140	180	—	—	35	670	10-φ 18 鑽通	230	135
BS300-420/800	420	35	140	140	140	140	170	—	35	800	12-φ 18 鑽通	360	185
BS300-420/940	420	35	175	175	175	175	175	—	30	940	12-φ 18 鑽通	500	198
BS300-420/1200	420	30	190	190	190	190	190	190	30	1200	14-φ 18 鑽通	760	210

※重量不含伺服馬達

### 5089# 伺服硬軌滾珠滑台 (300H) 上蓋滑道均貼耐磨片 With Turcite for Guideway Servo Slide With Hardness Guideway and Ball Screws (300H)

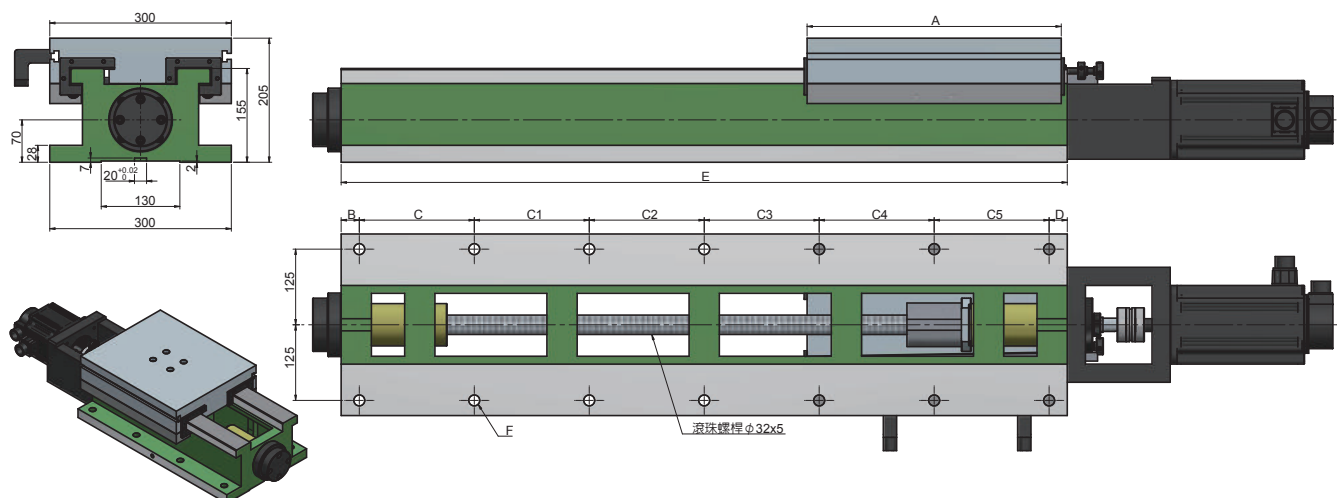

單位：mm

規格 Model	A	B	C	C1	C2	C3	C4	C5	D	E	F	行程 Travel	重量 Weight
BS300-300/420H	300	35	150	200	—	—	—	—	35	420	6-φ 18 鑽通	100	120
BS300-360/560H	360	35	165	165	165	—	—	—	30	560	8-φ 18 鑽通	180	140
BS300-420/560H	420	35	165	165	165	—	—	—	30	560	8-φ 18 鑽通	120	144
BS300-420/670H	420	35	140	140	140	180	—	—	35	670	10-φ 18 鑽通	230	178
BS300-420/800H	420	35	140	140	140	140	170	—	35	800	12-φ 18 鑽通	360	195
BS300-420/940H	420	35	175	175	175	175	175	—	30	940	12-φ 18 鑽通	500	210
BS300-420/1200H	420	30	190	190	190	190	190	190	30	1200	14-φ 18 鑽通	760	246

※重量不含伺服馬達