


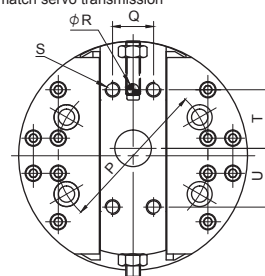
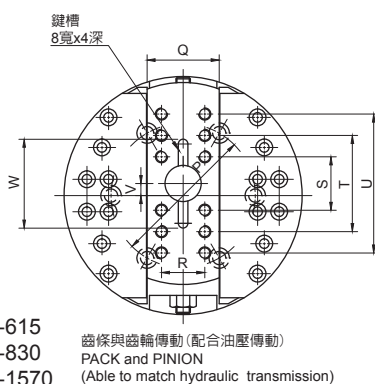
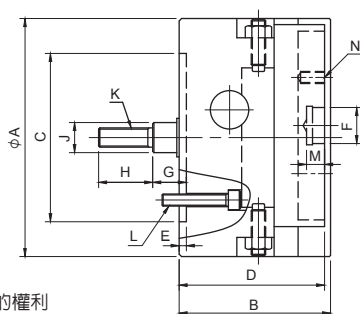
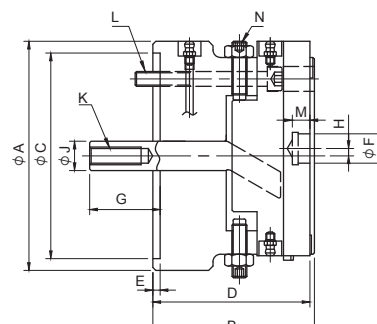


展刀搪溝頭 Single-Slide Facing Head



- 進給機構是以齒條與齒輪或單斜楔式傳動為之，進給速度穩定，進給速度與行程的調整非常容易。
- 摺動面均經硬化及精密研磨，剛性與耐久性非常良好。
- 定位精度： $\pm 0.03\text{mm}$
- Feed mechanism is transmitted by Rack and Pinion or Wedge Plunger, with steady feed speed. Simple adjustment for feed speed and stroke.
- Matching surfaces of all parts hardened, ground and lubricated directly. With Rigidity and durability.
- Stopper accuracy： $\pm 0.03\text{mm}$
- 與行控型迴轉油壓缸搭配使用。
- Suitable for using with RS type cylinder.



FA-610 單斜契式傳動 (配合伺服傳動)
FA-812 WEDGE PLUNGER
(Able to match servo transmission)

保留規格修改的權利
Subject to technical changes.

規格 Spec. 型號 Model.	楔心行程 mm Plunger stroke (Dia.)	滑座行程 mm Slider stroke	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	最大進給速數 mm/min. Max. feed speed	重量 kg Weight	適用油壓缸 Matching cylinder	最大使用壓力 Max. Pressure Mpa (kgf/cm ²)
FA-408	14	8	1600	400	4.2	RS-6520N	1.0(10)
FA-615	15	15	1200	300	11.9	RS-6520N	1.2(12)
FA-830	30	30	800	240	23.9	RS-6530N	1.8(18)
*FA-1570	70	70	500	120	167	RS-1080N	2.6(26)

規格 Spec. 型號 Model.	楔心行程 mm Plunger stroke (Dia.)	滑座行程 mm Slider stroke	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	容許油壓缸推力 kgf Max D.B. pull	l kg.m ²	重量 kg Weight	適用油壓缸 Matching cylinder
*FA-610	18	10	1200	280	0.04	14.5	RS-6520N
*FA-812	21	12	800	450	0.14	28.5	RS-6520N

寸法 Size 型號 Model.		A	B	C(H7)	D	E	F(H7)	G		H	J	K	L	M	N	P	Q	R	S	T	U	V	W
								max.	min.														
FA-615		150	107	110	102	5	25	40	25	35	20	M12×1.75	3~M10×40	12	8~M8×16	82.6	50	32	32	68	-	±7.5	56
FA-815		198	126	140	121	6	30	52	22	45	25	M16×2	6~M10×55	15	12~M10×20	120	60	36	40	80	120	±15	66
*FA-1570		400	200	300	192	6	60	110	40	75	50	M30×3.5	6~M20×90	15	8~M16×20	235	120	80	130	260	-	±17.5	-

寸法 Size		A	B	C _(H7)	D	E	F _(H7)	G		H	J	K	L	M	N	P	Q	R _(H7)	S	T	U
型號 Model.								max.	min.												
*FA-610		156	110	140	107	5	20	66	48	±5	20	M12×1.75	4~M10×90	12	2~M10×45	104.8	28	10	4~M10×16	40	40
*FA-812		198	130	170	127	5	25	84	63	±6	25	M16×2	4~M12×105	12	2~M12×60	133.4	32	10	4~M10×16	50	50

*表示接單生產之規格，無現貨供應。 Model produced only by order.