


5066# SD5-85 鑽孔主軸頭 Drilling Head Units

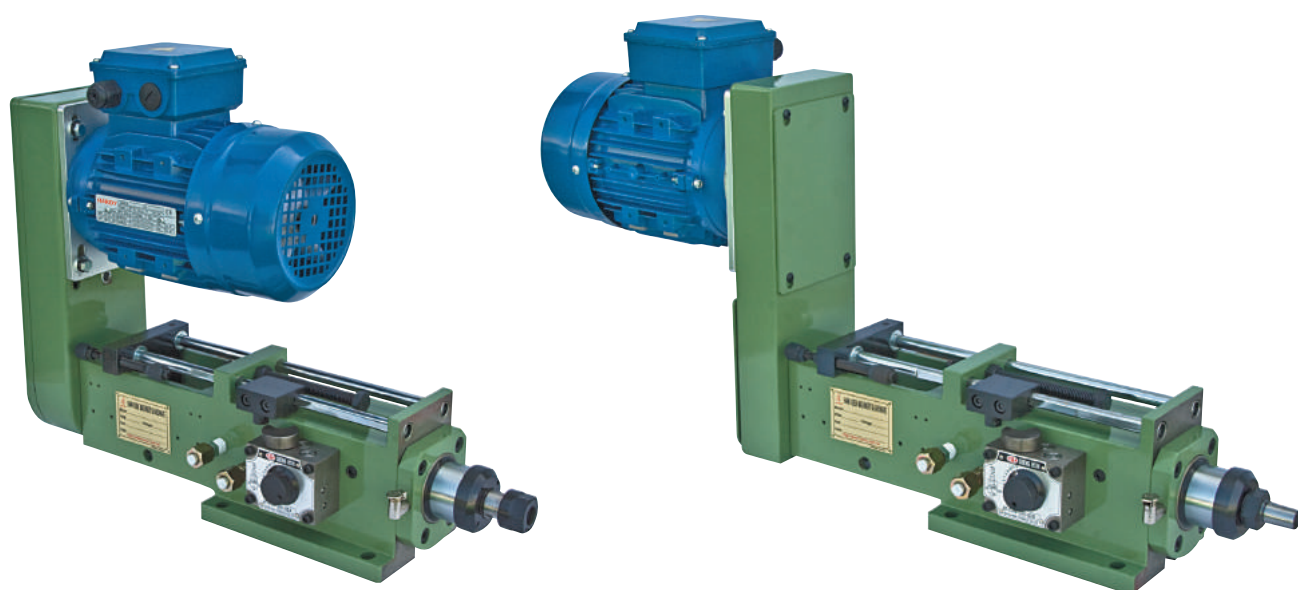

穩速器可選配美製 - 白馬牌






規 格	Model	SD5-85	SD5A-80
鑽孔能力	Drilling Capacity (S45C)	ϕ 13mm	
最大行程	Max. Stroke	85mm	80mm
最高轉速	Max. RPM	5000 RPM	
推進壓力	Propel Pressure	油壓 (H) 20~25 kg/cm ²	空壓 (A) 4~8 kg/cm ²
油缸面積	Cylinder Diameter	前進 (F) 21.5 cm ² 後退 (B) 11.5 cm ²	
馬 力	Horsepower, 3 Phase	1HP , 220V/380V	
傳動皮帶	Transmission Belt	5M - 615	
主軸軸承	Spindle Bearing	6004ZZ×4	
皮帶輪軸承	Pulley Bearing	6203ZZ×3	
前蓋油封	Front Cover Seal	DKB 50-62-10×1	
活塞O型環	Piston O-ring	AP-53×3	UHA-53×2
前蓋O型環	Front Cover O-ring	AG-58×2 , AP-50×2 AG-68×1	AG-58×2 , AP-50×1 AG-50×1 , AG-68×1
後蓋油封	Back Cover Seal	TC35-45-8×1	
後蓋O型環	Back Cover O-ring	AG-58×2 UH-35-45-6×1	AG-58×2 UHA-35-45-6×1

Roundness: $\leq 0.003\text{mm}$

5066# SD5-85 鑽孔主軸頭 Drilling Head Units

油壓Hydraulic SD5-85-ER20-FL(左向) / FR(右向)
油壓Hydraulic SD5-85-JT6-FL(左向) / FR(右向)

重量	Weight	39 kg
----	--------	-------

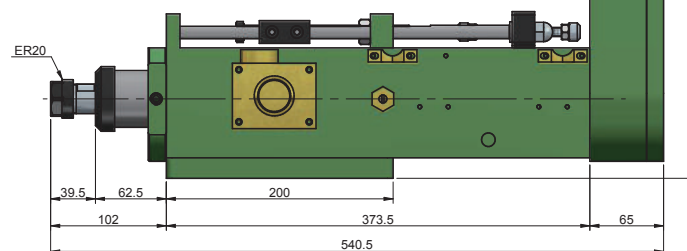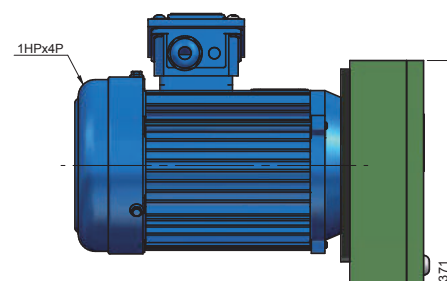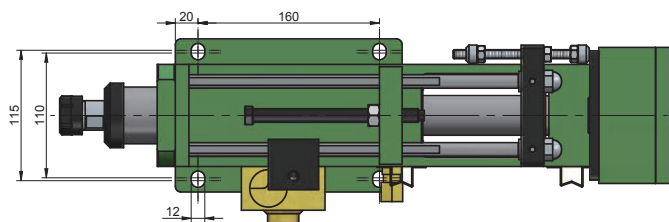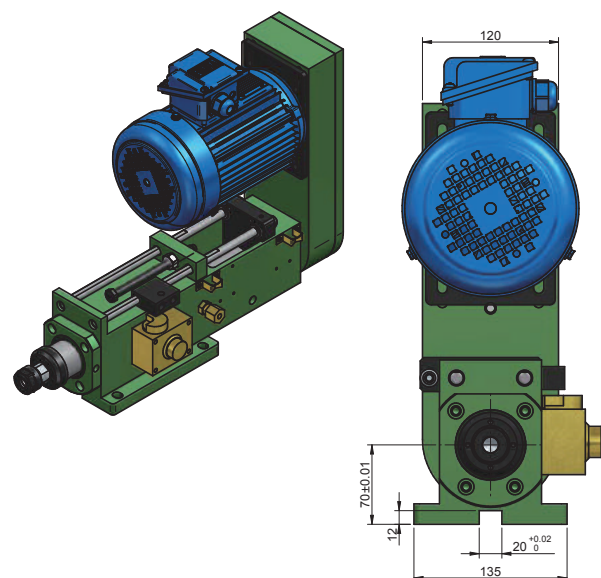

油壓Hydraulic SD5-85-ER20-BL(左向) / BR(右向)
油壓Hydraulic SD5-85-JT6-BL(左向) / BR(右向)

重量	Weight	39 kg
----	--------	-------

