

5067# SD7-130 鑽孔主軸頭 Drilling Head Units



馬達架組合


規 格	Model	SD7-130
鑽孔能力	Drilling Capacity (S45C)	φ 20 mm
最大行程	Max. Stroke	130 mm
最高轉速	Max. RPM	2500 RPM
推進壓力	Propel Pressure	油壓 (H) 20~30 kg/cm ²
油缸面積	Cylinder Diameter	前進 (F) 37 cm ² 後退 (B) 15.9 cm ²
馬 力	Horsepower, 3 Phase	1 HP , 220V / 380V
傳動皮帶	Transmission Belt	A2× φ 100 , 8M×40T×50W
主軸軸承	Spindle Bearing	6004Z , 32004 6005Z , 32005
皮帶輪軸承	Pulley Bearing	6008Z , 51208
前蓋油封	Front Cover Seal	TC60-70-10×1
活塞O型環	Piston O-ring	AP-65×2 , AG-35×1 , TC32-52-10×1
前蓋O型環	Front Cover O-ring	AP-60×2 , AG-70×1 , AG-80×1
後蓋O型環	Back Cover O-ring	AP-30×2 , AG-70×1 , AG-80×1

Roundness: ≤ 0.003mm

5067# SD7-130 鑽孔主軸頭 Drilling Head Units


SD7-130-ER20-R(右向)-MF
SD7-130-ER20-L(左向)-MF

重量	Weight	44 kg
----	--------	-------

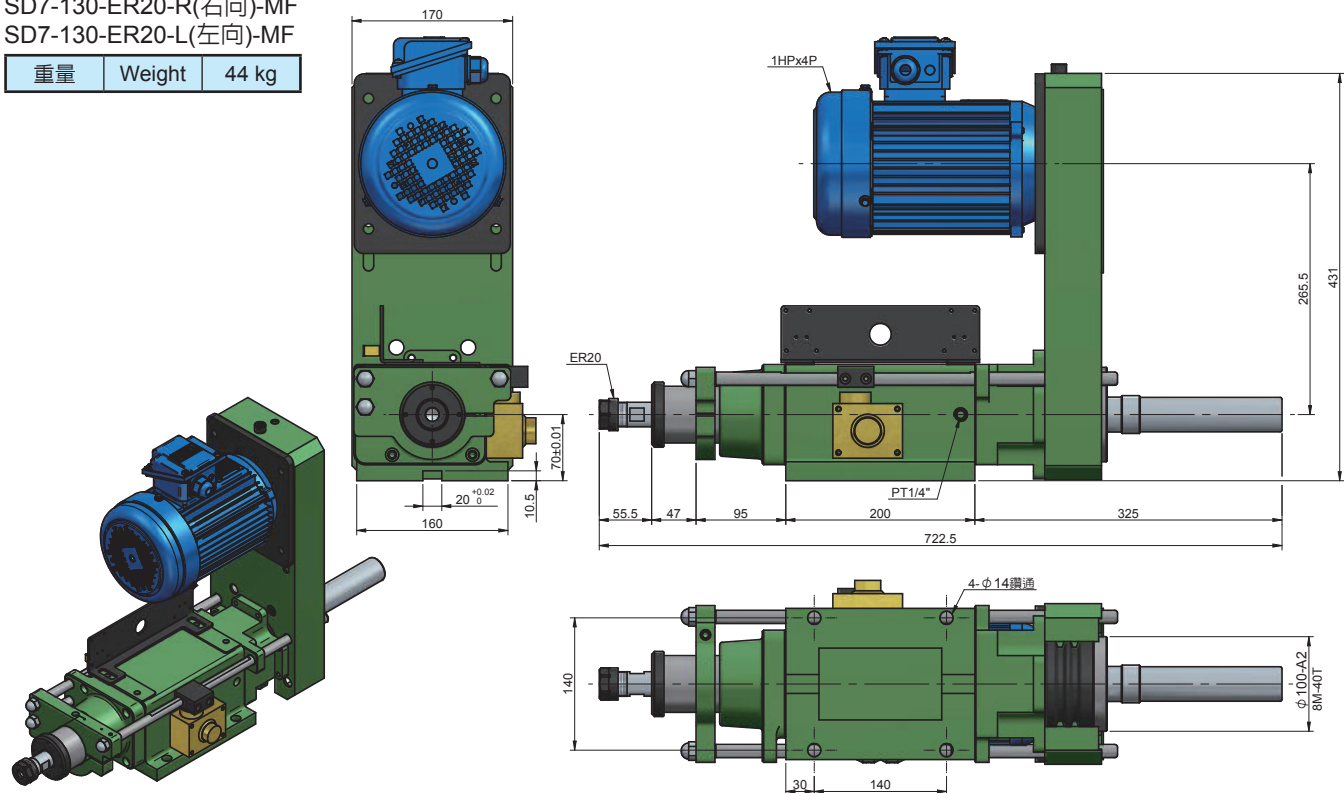

SD7-130-ER20-R(右向)-MB
SD7-130-ER20-L(左向)-MB

重量	Weight	44 kg
----	--------	-------

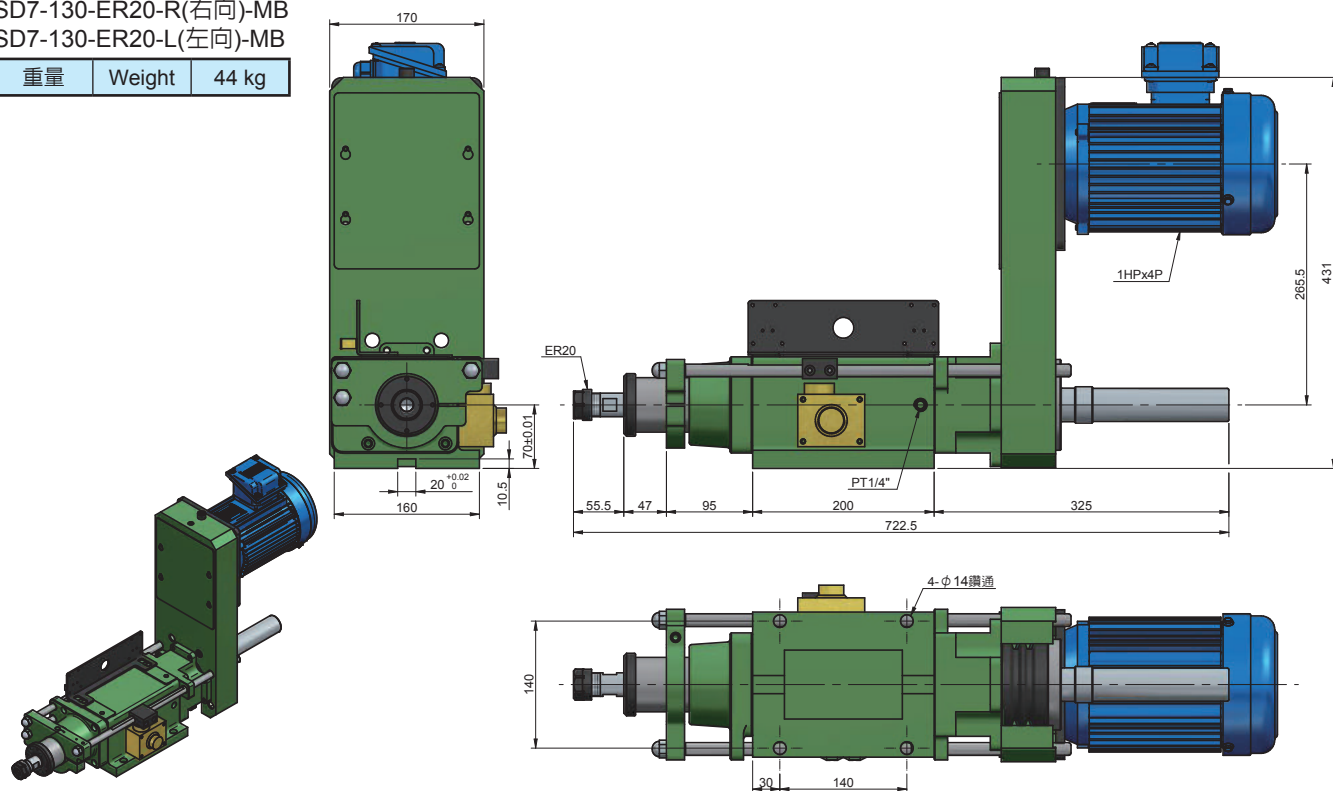



5067# SD7-130 鑽孔主軸頭
Drilling Head Units

SD7-130-ER20-AR(右向)
SD7-130-ER20-AL(左向)

重量	Weight	54 kg
----	--------	-------

