



5068# SD8-150 鑽孔主軸頭 Drilling Head Units

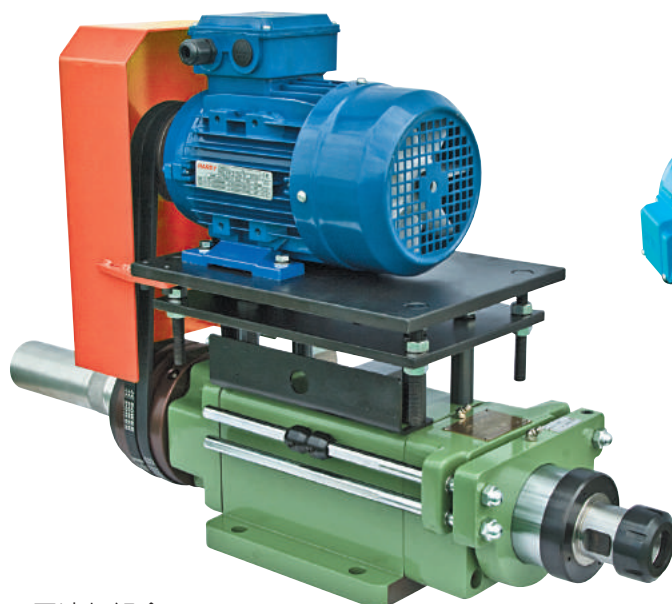

馬達架組合

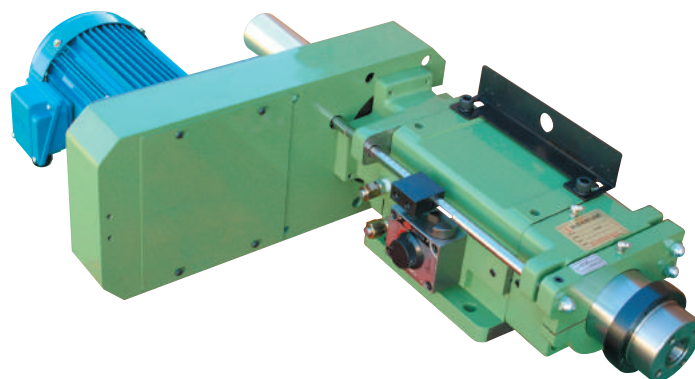

馬達盒組合


規 格	Model	SD8-150
鑽孔能力	Drilling Capacity (S45C)	φ 35 mm
最大行程	Max. Stroke	150 mm
最高轉速	Max. RPM	1500 RPM
推進壓力	Propel Pressure	油壓 (H) 20~35 kg/cm ²
油缸面積	Cylinder Diameter	前進 (F) 71.2 cm ² 後退 (B) 31.4 cm ²
馬 力	Horsepower, 3 Phase	2 HP , 220V / 380V
傳動皮帶	Transmission Belt	B2×φ 150 , 8M×58T×56W
主軸軸承	Spindle Bearing	6008Z , 32008 6010Z , 32010
皮帶輪軸承	Pulley Bearing	6013Z×1 , 51213×1
前蓋油封	Front Cover Seal	TC90-110-12×1
活塞O型環	Piston O-ring	AP-100×3 , AG-65×1 , TC60-82-12×1
前蓋O型環	Front Cover O-ring	AG-100×1 , AP-90×2 , AG-115×1
後蓋O型環	Back Cover O-ring	AP-55×2 , AG-100×1 , AG-115×1

Roundness: ≤ 0.003mm

5068# SD8-150 鑽孔主軸頭 Drilling Head Units


SD8-150-ER40-R(右向)-MF
SD8-150-ER40-L(左向)-MF

重量	Weight	96 kg
----	--------	-------

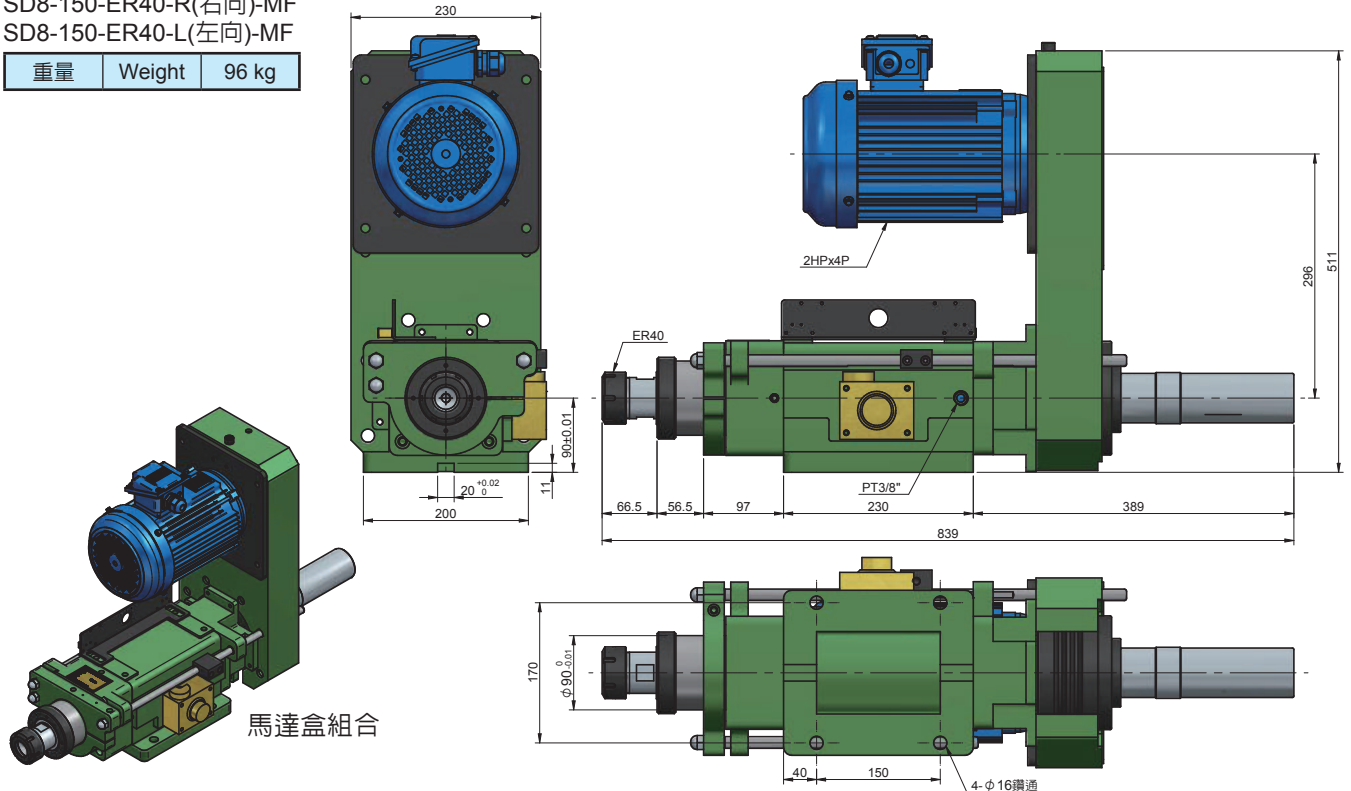

SD8-150-ER40-R(右向)-MB
SD8-150-ER40-L(左向)-MB

重量	Weight	96 kg
----	--------	-------

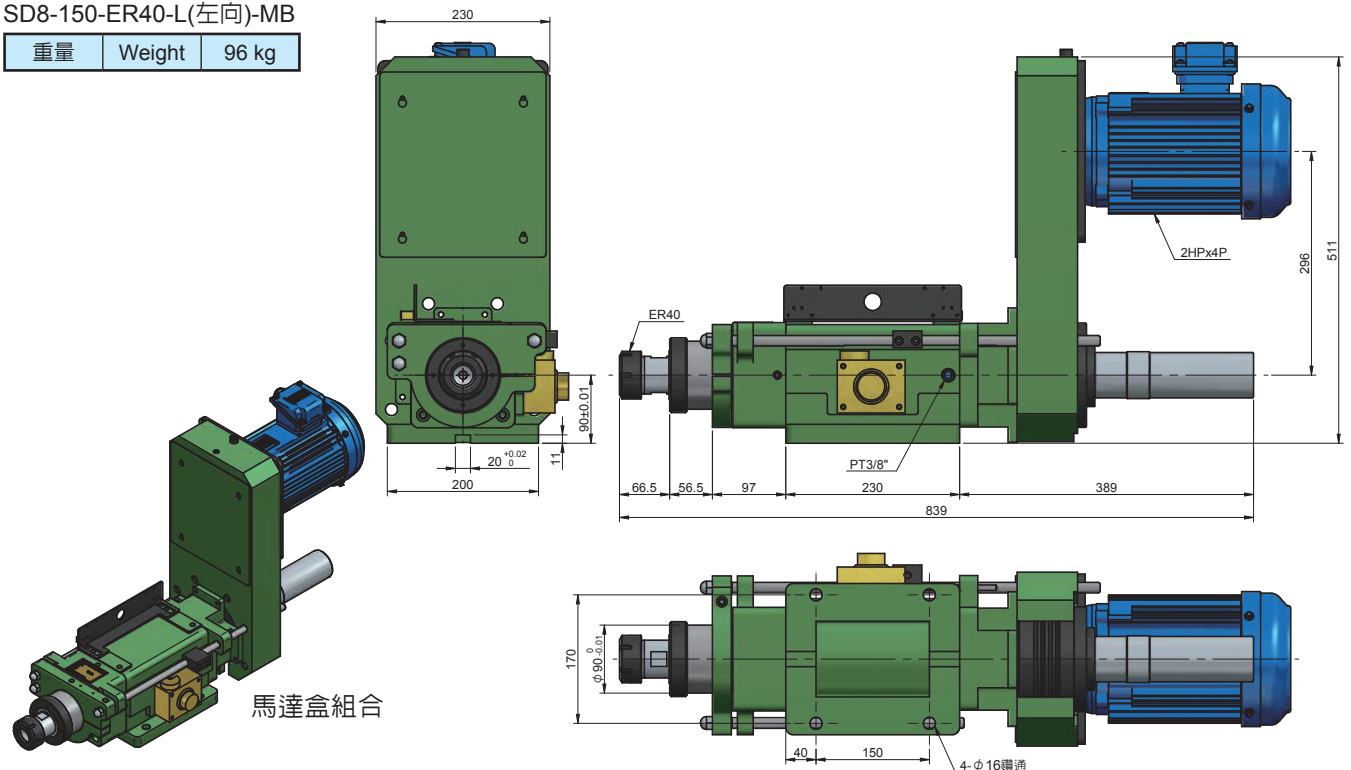

5068# SD8-150 鑽孔主軸頭 Drilling Head Units

SD8-150-ER40-AR(右向)

SD8-150-ER40-AL(左向)

重量	Weight	103 kg
----	--------	--------

